

Overvoltage protection chip which has withstand voltage of 32V

1 Features

- Over-voltage protection :6.1V/12V
- OVP response time :100ns
- input voltage tolerance up to 32V
- Integrated short-circuit protection
- Integrated over-temperature protection
- Package: SOT-23-3

2 Applications

- Low-Power Handheld Devices
- Mobile phones, tablets and other portable devices


3 Description

The IP2611 is an integrated IC with input overvoltage protection.

Input voltage tolerance up to 32V. When the input voltage is detected to be greater than the OVP protection threshold, the integrated power tube can be quickly shut down to prevent the input high voltage from damaging the device on the output.

The IP2611 has integrated over-temperature protection and shuts down the power tube output when the internal temperature of the chip is detected

4 Simplify the application schematic

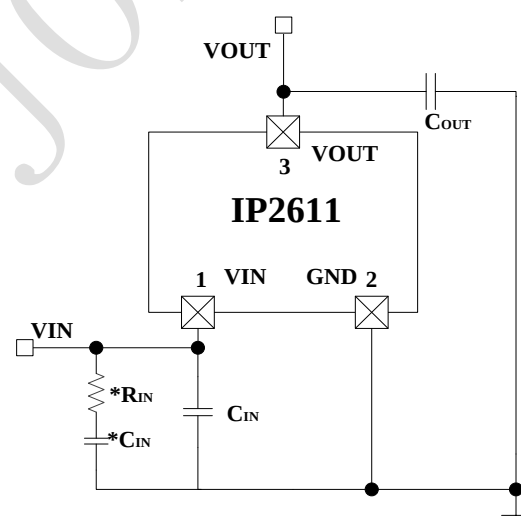

*There are more than 24V plugs that need to add
 *C_{IN}, *R_{IN}
 It is recommended that *C_{IN}=1uF, *R_{IN}=2R

Figure1 IP2611 Simplify the application schematic

Directory

1	FEATURES	1
2	APPLICATIONS	1
3	DESCRIPTION	1
4	SIMPLIFY THE APPLICATION SCHEMATIC	1
5	MODIFY RECORDS	3
6	COMMON CUSTOM PRODUCT DESCRIPTION	3
7	PIN DESCRIPTION	4
	7.1 Pin Description	4
8	INTERNAL BLOCK DIAGRAM OF THE CHIP	5
9	LIMIT PARAMETERS	5
10	RECOMMENDED OPERATING CONDITIONS	5
11	ELECTRICAL CHARACTERISTICS	6
12	FUNCTION DESCRIPTION	7
	12.1 Input overvoltage protection	7
	12.2 Output short-circuit protection	7
	12.3 Over-temperature protection	7
	12.4 Apply curves	7
	12.5 Temperature characteristic curve	8
13	TYPICAL APPLICATION SCHEMATIC	9
14	BOM	9
15	SILK SCREEN INSTRUCTIONS	10
16	PACKAGE	11
17	IMPORTANT NOTICE	12

5 Modify records

Version V1.00 changed in June 2022

Changed Version V1.00 to Version V1.01 (June 2023)

Page

-
- Chapter 10 increases the maximum continuous current parameter.....5
-

Changed Version V1.01 to Version V1.02 (July 2024)

Page

-
- Modify package size11
-

6 Common Custom Product Description

Name	Description
IP2611	Standard IP2611 (6.1V overvoltage protection)
IP2611H	12V overvoltage protection

7 Pin Description

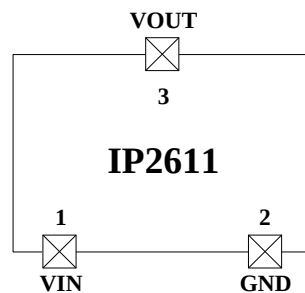


Figure2 Pin of IP2611

7.1 Pin Description

Name	Number	Description
1	VIN	Input pin
2	GND	Ground pin
3	VOUT	Output pin

8 Internal block diagram of the chip

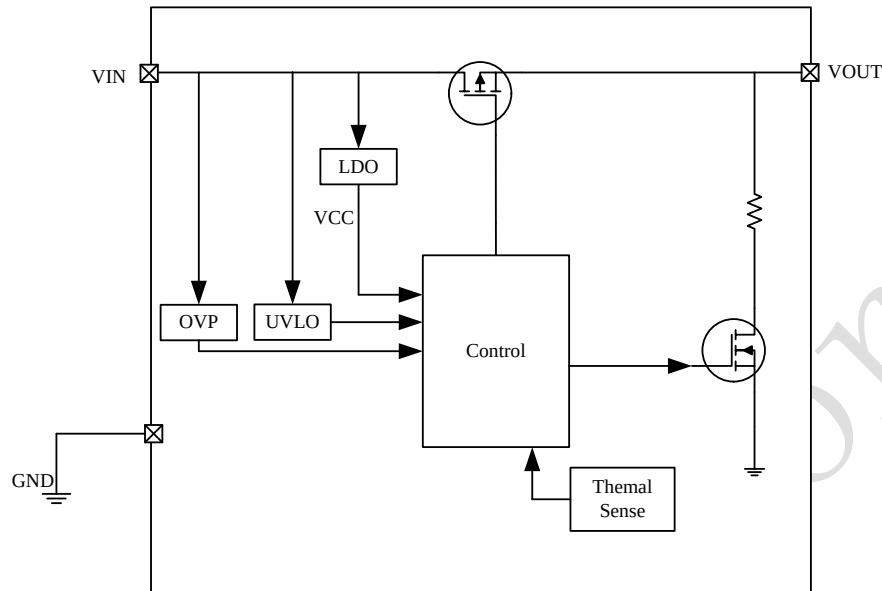


Figure3 Internal block diagram of IP2611

9 Limit parameters

Parameter	Symbol	Value	Units
Input voltage Range	V_{IN}	-0.3 ~ 36	V
Output voltage Range	V_{OUT}	-0.3 ~ 20	V
Junction temperature Range	T_J	-40 ~ 150	°C
Storage Temperature Range	T_{stg}	-65 ~ 150	°C
Package Thermal Resistance	θ_{JA}	220	°C/W
Human Body Model (HBM)	ESD	4	KV

*Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to Absolute Maximum Rated conditions for extended periods may affect device reliability.

10 Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit
Input Voltage	V_{IN}	3	5	36	V
MAX Continuous Output current	I_{OUT}			1	A

*Devices' performance cannot be guaranteed when working beyond those Recommended Operating Conditions.

11 Electrical Characteristics

Unless otherwise specified, $T_A=25^{\circ}\text{C}$, $V_{IN}=5\text{V}$

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Input Voltage						
Startup delay time	T_{DE}	V_{IN} rises from 0V to 5V in 1uS		15		μs
Input quiescent current	I_{DD}	$V_{IN}=5\text{V}$, no load at the output		250		μA
On-resistance	$R_{DS(on)}$	$V_{IN}=5\text{V}$, $I_{OUT}=0.5\text{A}$		350		$\text{m}\Omega$
Input overvoltage protection						
OVP voltage	V_{OVP}	V_{IN} rises from 5V to 7V	5.9	6.1	6.3	V
OVP hysteresis voltage	V_{OVP_HYS}	V_{IN} drops from 7V to 5V		300		mV
OVP response time	$t_{PD(OVP)}$			100	300	ns
OVP Recovery time	$t_{REC(OVP)}$			7		μs
Output short-circuit protection						
Short-circuit protection threshold	V_{SCP}	$V_{IN}-V_{OUT}>1\text{V}$		1		V
Short-circuit protection response time	T_{SC}			400		μs
Short-circuit protection recovery time	$t_{REC(SCP)}$			5		ms
Thermal shutdown junction temperature	T_{OTP}	Rising temperature	130	140	150	$^{\circ}\text{C}$
Thermal shutdown hysteresis	ΔT_{OTP}		30	40	50	$^{\circ}\text{C}$

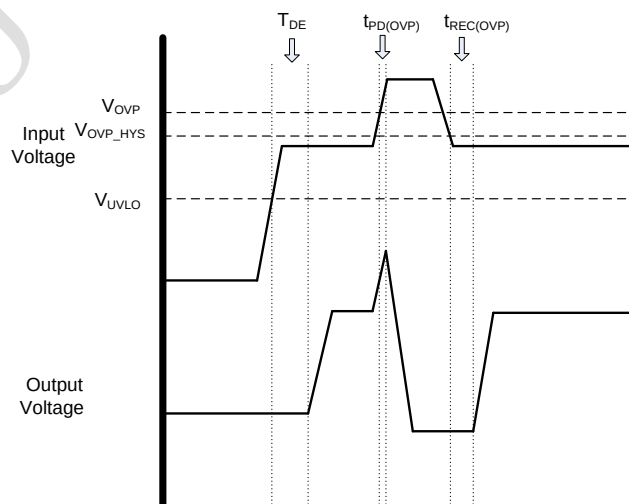


Figure4 timing diagram

12 Function description

12.1 Input overvoltage protection

When the input voltage exceeds the set V_{OVP} , the internal power tube will turn off within 100ns, turning off the output. When the input voltage drops to V_{OVP_HYS} , the output is turned back on.

12.2 Output short-circuit protection

When the output is shorted, the IP2611 enters the protected state and hiccups restart until the output short circuit state is canceled.

12.3 Over-temperature protection

When the chip junction temperature is detected to be greater than 140° , it will enter the over-temperature protection state. Close internal power tube and stop the output.

12.4 Apply curves



Figure5 VIN power-on start (VIN=5V)



Figure6 VIN powered off (VIN=5V-0V)



Figure7 VIN voltage protection (VIN=5V-7V)



Figure8 VIN voltage recovery (VIN=7V-5V)

12.5 Temperature characteristic curve

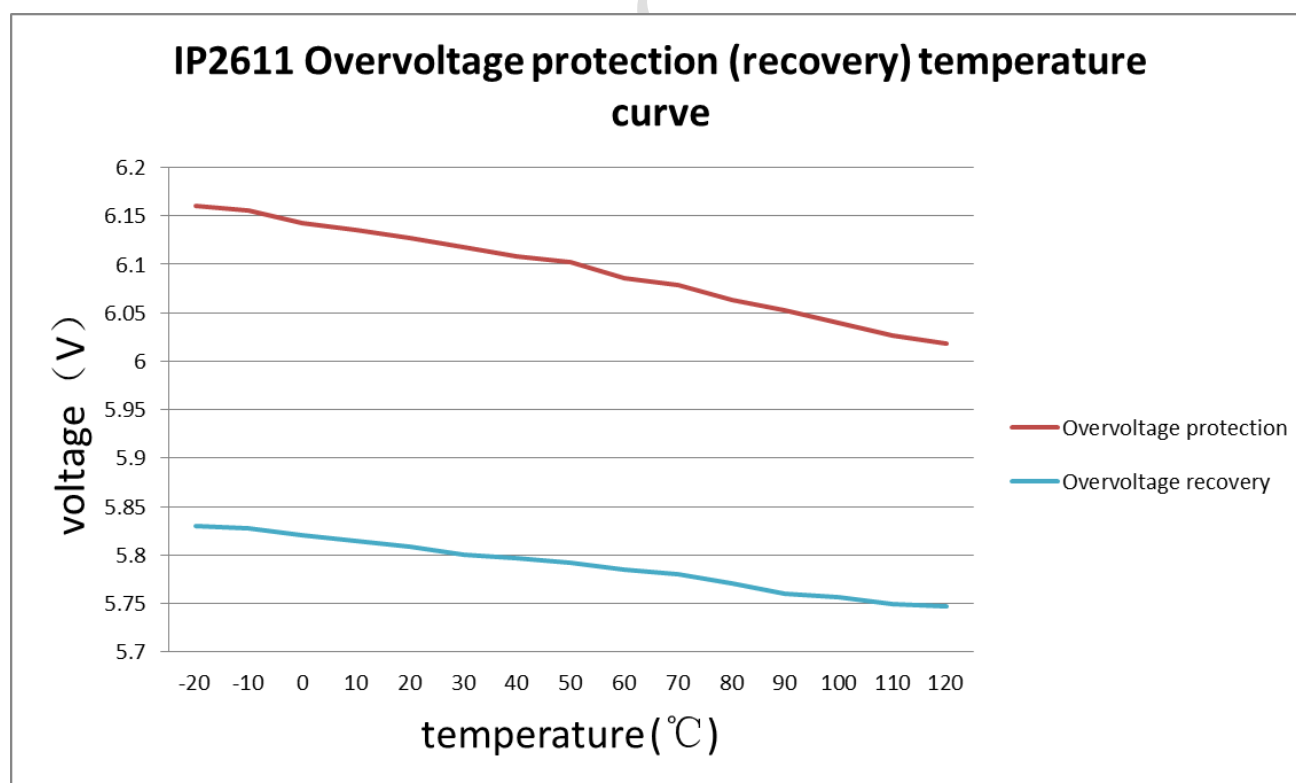


Figure9 voltage protection (recovery) temperature curve

13 Typical application schematic

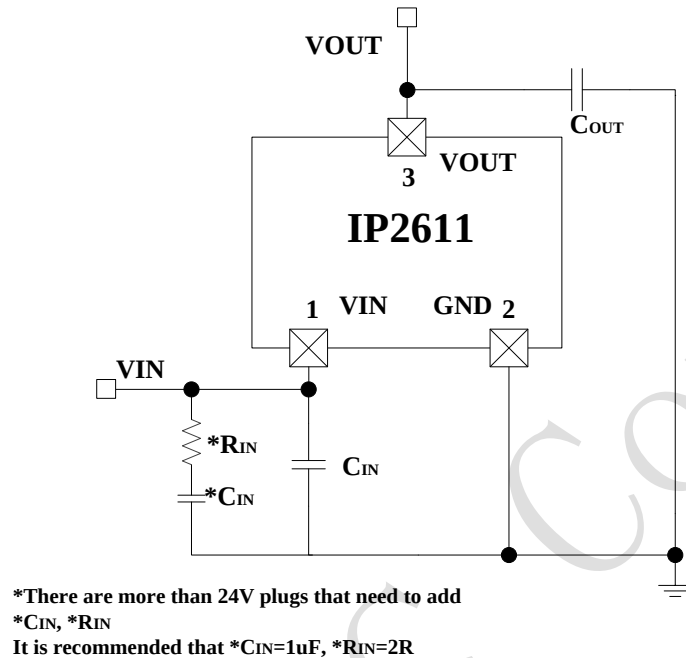


Figure10 Typical application schematic

14 BOM

Number	Component name	Model & Specification	Units	amount	location	note
1	IC	IP2611	PCS	1	U1	
2	SMD capacitors	0603 104 50V 10%	PCS	2	C _{IN} 、C _{OUT}	
3	SMD capacitors	0603 1uF 50V 10%	PCS	1	*C _{IN}	
4	SMD resistors	0603 5.1Ω	PCS	1	*R _{IN}	

15 Silk screen instructions




Explain:

- 1、2611 --Product name
- 2、XXXX --Product number
- 3、○ --Pin1 position

Figure 11 IP2611 Screen printing

16 Package

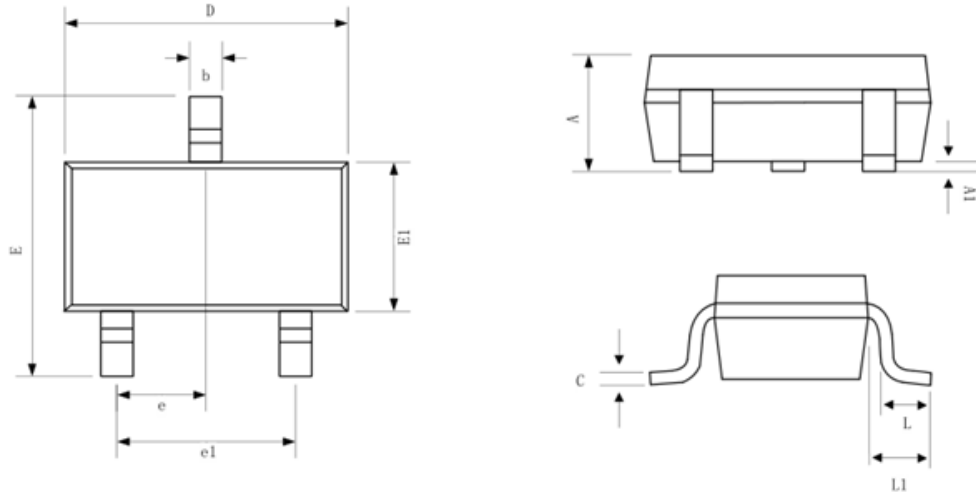

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	1.000	--	1.250
A1	0.000	0.050	0.100
b	0.300	0.400	0.500
c	0.100	0.150	0.200
D	2.800	2.900	3.000
E	2.600	2.800	3.000
E1	1.500	1.600	1.700
e	0.950BSC		
e1	1.900BSC		
L	0.400	0.500	0.600
L1	0.600REF		

Figure12 IP2611 SOT23-3 Package outline dimension

17 IMPORTANT NOTICE

INJOINIC TECHNOLOGY and its subsidiaries reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to INJOINIC TECHNOLOGY's terms and conditions of sale supplied at the time of order acknowledgment.

INJOINIC TECHNOLOGY assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using INJOINIC TECHNOLOGY's components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of INJOINIC TECHNOLOGY's components in its applications, notwithstanding any applications-related information or support that may be provided by INJOINIC TECHNOLOGY. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify INJOINIC TECHNOLOGY and its representatives against any damages arising out of the use of any INJOINIC TECHNOLOGY's components in safety-critical applications.

Reproduction of significant portions of INJOINIC TECHNOLOGY's information in INJOINIC TECHNOLOGY's data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. INJOINIC TECHNOLOGY is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

INJOINIC TECHNOLOGY will update this document from time to time. The actual parameters of the product may vary due to different models or other items. This document voids all express and any implied warranties.

Resale of INJOINIC TECHNOLOGY's components or services with statements different from or beyond the parameters stated by INJOINIC TECHNOLOGY for that component or service voids all express and any implied warranties for the associated INJOINIC TECHNOLOGY's component or service and is an unfair and deceptive business practice. INJOINIC TECHNOLOGY is not responsible or liable for any such statements.